LMB S/L/U For conveying products between lines

A servo-driven, lugged (flighted) conveyor designed for inline use with stitchertrimmers or perfect binders. Heavy duty Unichain lugged transport For maintaining spine leading product 460volt 3 phase power Max book size 18"w x 11"I (full-width model) Max book size 9"w x 11"I (half-width model) Min book size 5"w x 3"I 14" flight spacing


Models available for:

- Labeling
- Imaging
- Tipping
- Interleaving
- Product turnover

Integrated with

- Up to 300 feet per minute (15,000 hour) running inline with other mailing and finishing equipment
- Simple to set up and run

230V 1 phase std. 460V 3 phase optional

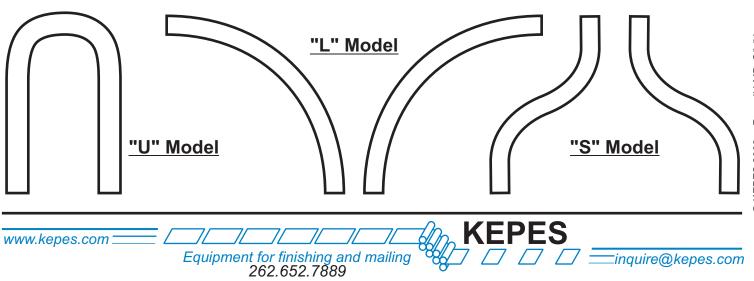

© KEPES 2008 Page # LMB_S/L/U