


LMB TO

For turn over or passthrough stitched booklets

A servo-driven, belted mail base designed for inline use with stitcher-trimmers or perfect binders.

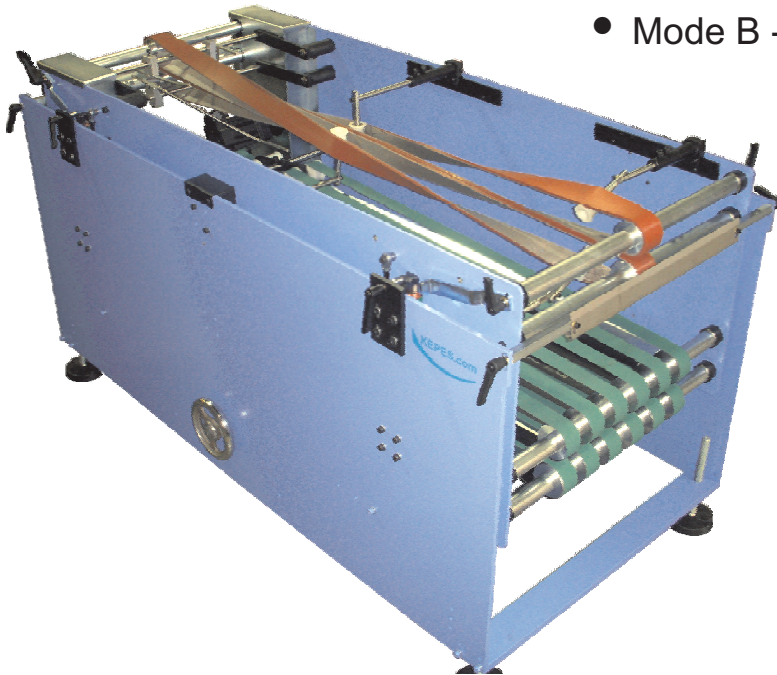

Features:

- Turn over maintains lead edge
- Mode change does not change timing or book sequence in print control
- Mode A - Passthrough 1-up or 2-up
- Mode B - Turn over 1-up only

Models available for:

- Labeling
- Imaging
- Tipping
- Interleaving
- Postal sealing
- Product turnover

Integrated with

- Up to 450 feet per minute (23,000 hour) running inline with other mailing and finishing equipment
- Simple to set up and run
- Mobile base

230V 1 phase std.

460V 1 phase optional

Product Sizes

- Max. product 18.5"w x 12"l
- Min. product 5"w x 3"l
- Max Thickness 3/8" compressed
- Turnover for one up products or pass thru for two up

