


TO Turnover Transport

In-line turnover transport conveyor

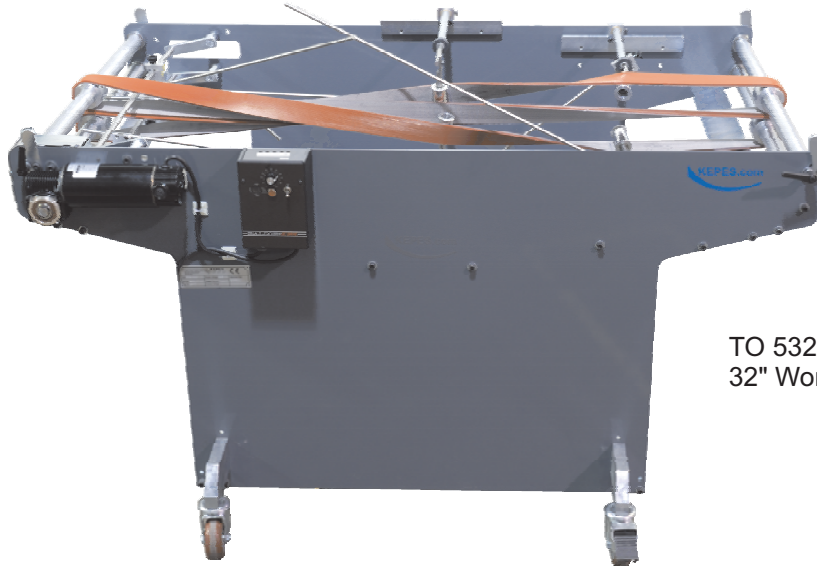

TO 532 Shown
32" Working Width

Uses top and bottom belt set
Maintains lead edge in as lead edge out
Variable for product thickness

Standard Specifications

Electronic variable speed - up to 600fpm

Model	OAL	Max Product Width
TO 520	62	20
TO 532	62	32
TO 920	108	20
TO 932	108	32

Working height - 32" Standard, -3", +3"
Mobile base with leveling pads

Recommended product size

Min. product width - 3"


Max. product thickness - .25"

Power Requirements

110v AC - 10 Amps Standard

230v AC Optional

Position following servo drive

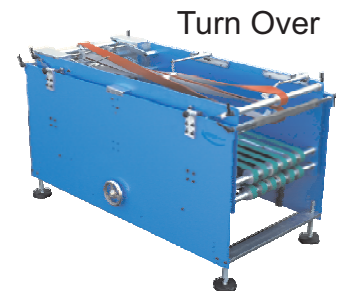

Turn Over



Passthrough

